



TRUE BLUE® BATH WASTE HALF KIT WITH CONDENSATE ADAPTER

| | |
|----------------------|------------------|
| Job Name _____ | Item # _____ |
| Location _____ | |
| Engineer _____ | Contractor _____ |
| PO # _____ | Tag _____ |
| Representative _____ | |

SPECIFICATIONS

The Dearborn True Blue Bath Waste shall be used in commercial and residential applications requiring a bath waste and overflow drain with integrated test features. Overflow and drain elbow components shall come factory preassembled for added convenience. Overflow gasket shall be made of a high memory foamed rubber. Drain gasket shall be notched and undercut in order to wrap around drain elbow and lock into place. This will prevent gasket from being knocked off during installation and remain secured to drain elbow regardless of orientation. Test plugs shall be quarter turn installation and must be removable and reusable. Overflow test plug shall be used to install the designer trim veneer with a quarter turn and will not require additional tools or sealants for installation. Faceplate installation shall not require additional tools or screws, symmetrical design will eliminate the need for precise alignment. Condensate Adapter will be .75" Male NPT Threads and will come off of the Overflow Elbow at 45 degrees. The Condensate Adapter will come integrated to the Overflow Elbow and will not require additional solvent weld fittings.



APPROVALS AND LISTINGS

ASME A112.18.2-2015/CSA B125.2-15



Uniform Plumbing Code (UPC®)



National Plumbing Code of Canada



International Plumbing Code (IPC®)



ASME A112.18.2-2015/CSA B125.2-15


Listed with Massachusetts Board of Plumbing

FEATURES AND MATERIALS

| | |
|-----------------|-----------------------------------------------|
| Finish Trim | Tool-Free, Screw-Free Installation |
| Test Plugs | Reusable, Quarter Turn Tool-Free Installation |
| Drain Gasket | Locking Rubber Gasket |
| Overflow Gasket | High Memory Foamed Rubber |
| Spud | Chrome Plated Brass |
| Condensate | Integrated Elbow Adapter |

PERFORMANCE SPECIFICATIONS

| | |
|------------------|--------------------|
| Test Plug Rating | 40 FT Head, 17 PSI |
| Flow Rate | 10.95 GPM |

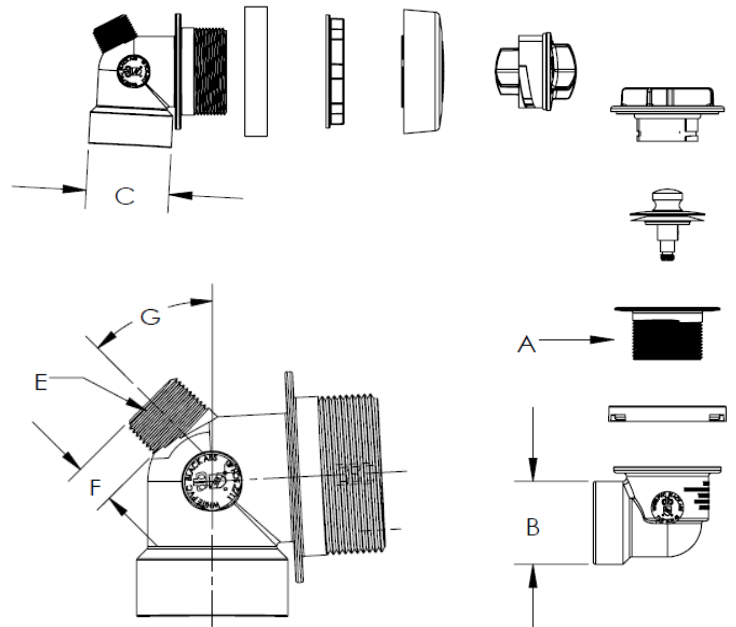

DIMENSIONS

| | | |
|------|---------------------|------------------|
| [A]: | Drain / Spud Thread | 1.5" – 11.5 NPSM |
| [B]: | Inner Diameter | 1.5" SCH 40 Pipe |
| [C]: | Inner Diameter | 1.5" SCH 40 Pipe |
| [E]: | Thread Diameter | .75" – 14 NPT |
| [F]: | Thread Length | 0.6" |
| [G]: | Thread Angle | 45° |

Access BIM/Revit content through www.oatey.com



**TRUE BLUE®
BATH WASTE HALF KIT
WITH CONDENSATE ADAPTER**

PRODUCT SELECTOR

| TRUE BLUE® BATH WASTE HALF KIT WITH CONDENSATE ADAPTER | | | | | | |
|--------------------------------------------------------|----------------|----------|---------------|--------|---------------------|---------------------|
| ✓ | Product Number | Material | Stopper Style | Finish | Drain Spud Material | Test Plugs Included |
| | A9960CPC | ABS | UNI-LIFT | CHROME | CHROME PLATED BRASS | YES |
| | P9960CPC | PVC | UNI-LIFT | CHROME | CHROME PLATED BRASS | YES |