



OATEY QUIET PIPES® HAMMER ARRESTORS SIZE A-F

Job Name _____ Item # _____
 Location _____
 Engineer _____ Contractor _____
 PO # _____ Tag _____
 Representative _____

SPECIFICATIONS

Oatey Quiet Pipes Hammer Arrestors shall be installed in any diameter pipe supply application which could experience water hammer due to quick closing valves or faucets. Arrestor chambers shall be specifically sized to accommodate and dissipate energy generated by such valves and faucets. Arrestors shall be effective when installed at any angle. Arrestor shall be lead-free, made of copper and include a polypropylene piston with two NBR o-rings. Arrestors shall be ANSI/ASSE1010-2004 certified and approved for installation with no access panel required. Compatible with press fittings or push fittings.

FEATURES & MATERIALS

Arrestor Body	Copper (Type K)
Piston	Polypropylene with two NBR O-rings
Piston Lubrication	Dow Corning Molykote 111
Fittings Available	Male Sweat, Female CPVC, MIP, F1807 PEX & F1960 PEX (no lead brass C46400)

PERFORMANCE SPECIFICATIONS


Temperature Range	33°- 180° F
Max Working Pressure	0-400 PSI

LISTINGS & CODE APPROVALS

ANSI/ASSE1010-2004		
cUPC		
PDI WH-201-2017		

DIMENSIONS

Arrestor Size	A	A	A	A	A	B	B	B	B	B	C	C	C	C	C	D	D	E	E	F	F
Product #	34476	34481	34482	34499	34491	34500	34484	34492	34493	34495	34477	34485	34501	34494	34496	34502	34497	34479	34503	34480	34504
Arrestor Body Diameter [A]:	1.125"	1.125"	1.125"	1.125"	1.125"	1.125"	1.125"	1.125"	1.125"	1.125"	1.375"	1.375"	1.375"	1.375"	1.375"	1.625"	1.625"	2.125"	2.125"	2.125"	2.125"
Overall Height [B]:	4.78"	4.76"	4.68"	6.73"	4.93"	7.31"	5.39"	5.82"	5.32"	5.6"	6.94"	6.74"	8.45"	6.57"	6.96"	10.08"	8.10"	9.24"	11.00"	11.23"	13.00"
Fitting Type [C]:	F1960 PEX	MIP	F1807 PEX	Male Sweat/Press	Female CPVC	Male Sweat/Press	MIP	Female CPVC	F1807 PEX	F1960 PEX	Female CPVC	MIP	Male Sweat/Press	F1807 PEX	F1960 PEX	Male Sweat/Press	MIP	MIP	Male Sweat/Press	MIP	Male Sweat/Press
Fitting Size [C]:	1/2"	1/2"	1/2"	1/2"	1/2"	3/4"	3/4"	3/4"	3/4"	3/4"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"	1"

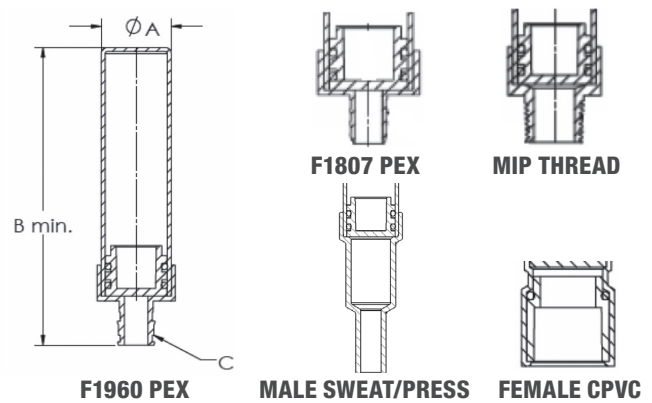

PRODUCT SELECTOR

✓	Product Number	Description	✓	Product Number	Description	✓	Product Number	Description	✓	Product Number	Description
	34476	A, 1/2" F1960 PEX		34484	B, 3/4" MIP		34485	C, 1" MIP		34497	D, 1" MIP
	34481	A, 1/2" MIP		34492	B, 3/4" Female CPVC		34501	C, 1" Male Sweat/Press		34479	E, 1" MIP
	34482	A, 1/2" F1807 PEX		34493	B, 3/4" F1807 PEX		34494	C, 1" F1807 PEX		34503	D, 1" Male Sweat/Press
	34499	A, 1/2" Male Sweat/Press		34495	B, 3/4" F1960 PEX		34496	C, 1" F1960 PEX		34480	F, 1" MIP
	34491	A, 1/2" Female CPVC		34477	C, 1" Female CPVC		34502	D, 1" Male Sweat/Press		34504	F, 1" Male Sweat/Press
	34500	B, 3/4" Male Sweat/Press									

*Limited Lifetime Warranty – See Oatey.com/warranty for details.

Access BIM/Revit content through Oatey.com